

# TX-NR1008 9.2-Channel Network AV Receiver

**BLACK** **SILVER**


The less frequently used controls are neatly tucked away behind the drop-down panel.



## The Easy Way to Enjoy Home Networking and Distributed Audio

The TX-NR1008 is an upper-mid-range A/V powerhouse designed to give you maximum set-up flexibility in the home. Its 9.2 speaker channels let you enjoy a multichannel source in your main room, plus powered audio in two other rooms. Or you can use the extra channels to take full advantage of the new surround dimensions of Audyssey DSX™ and Dolby® Pro Logic® IIz. Other processing highlights include DTS-HD Master Audio™ and Dolby® TrueHD for pristine lossless audio on Blu-ray Disc, and HDMI® upscaling of all video sources to 1080p with Faroudja DCDi Cinema™. As a network A/V receiver compatible with Windows® 7 and DLNA, the TX-NR1008 lets you stream audio from your PC or from internet radio channels such as vTuner and Last.fm. Set up and calibration are easy and accurate, thanks to ISF video calibration, a new overlaid graphical on-screen display, and Audyssey room correction and equalization. Bi-amping capability and a smorgasbord of the latest connections complete what is an outstanding entertainment package.

### HDMI® 1.4a Support for 3D Video and Audio Return Channel

The seven HDMI 1.4a inputs on the TX-NR1008 let you simultaneously connect high-def sources such as a Blu-ray player, a gaming console, and a cable/satellite tuner. And the two HDMI outputs let you send a pristine signal at the same time to two different high-resolution displays. As the latest version of this connector, HDMI 1.4a adds the exciting possibilities of 3D video and an Audio Return Channel. 3D video is the next big thing in home entertainment, with movie, game, and broadcast content on the increase and 3D-compatible TVs coming to market. The TX-NR1008 also offers the convenience of an Audio Return Channel via HDMI. Audio content received directly by your HDTV's tuner can be sent "upstream" to your A/V receiver, without the need for a separate S/PDIF audio cable.

### PC Audio and Internet Radio via Network Function with DLNA 1.5 and Windows® 7 Compatibility

As one of Onkyo's new breed of receivers that can link directly to the internet or to your home PC via a local network, the TX-NR1008 takes streaming audio and internet radio to a whole new level. MP3, WMA, WMA Lossless, FLAC, WAV, Ogg Vorbis, AAC, and LPCM audio files—whether on your PC or from the internet—can now be played back through your main system with unprecedented power and fidelity. The TX-NR1008 brings to life a huge array of internet radio channels from Last.fm, Napster, and vTuner\*. As well as being compatible with earlier platforms, the receiver is compatible with Microsoft's new Windows 7 platform, which includes the DLNA 1.5-specified "Play To" media-

streaming feature. Another benefit of having the TX-NR1008 connected to the internet is that you can then easily update its firmware.

\*Availability of services depends on region.

### Audyssey DSX™ and Dolby® Pro Logic® IIz Add New Dimensions to Surround Sound

The TX-NR1008 handles two new surround-sound technologies from Audyssey and Dolby that offer exciting new ways to set up the speakers in your home cinema system. Audyssey DSX lets you incorporate "front wide" speakers, in place of the usual surround back speakers, to expand the width of the soundstage. Set up at a recommended 60° off center; these channels help to produce a more realistic soundstage and a more immersive listening experience. Alternatively, Audyssey DSX can reconfigure the TX-NR1008's surround back channels to deliver "front height" channels. These channels carry ambient, non-directional audio that adds a new vertical dimension to your movies and games. Dolby Pro Logic IIz provides a similar front-height speaker option that likewise works to create a more enveloping home cinema experience.

### THX® Select2 Plus™ Certified

THX Select2 Plus certification is specified for rooms where the screen-to-seat viewing distance is 3 to 4 meters and the room volume is around 56 cubic meters. To achieve THX Select2 Plus certification, the TX-NR1008 had to meet the world's most demanding standards for home cinema audio quality and performance, and play at reference volume levels with minimal distortion.



# TX-NR1008 9.2-Channel Network AV Receiver

## ISF (Image Science Foundation) Video Calibration for Accurate Video Reproduction

The TX-NR1008 is equipped with industry-leading ISF (Imaging Science Foundation) video calibration to dramatically improve your home cinema by enabling you to adjust the brightness, hue, contrast, saturation, and gamma levels on all video inputs. Transforming your A/V receiver into a video hub, this function enables to improve energy savings in displays and projectors by up to 50%.

## HDMI Video Upscaling to 1080p with Faroudja DCDi Cinema™

When it comes to video processing, Faroudja DCDi Cinema offers several advantages. This processor can accept any video signal, regardless of the source resolution, and upscale it to 1080p to match the native resolution of your high-definition display. What's more, DCDi Cinema effectively removes video artifacts such as jagged edges during the video signal deinterlacing process. You get to enjoy smooth progressive scan video images, even for fast-moving sports and action scenes.

## Playback of Different Audio Sources in Up to Three Rooms

With Powered Zone 2/3, you can enjoy surround-sound entertainment in the main room, while playing back different stereo sources in a second and third zone, each equipped with a pair of speakers. Alternatively, you can use the Zone 2 and Zone 3 pre-outs to send separate, unamplified audio signals to amplifiers (and speakers) in a second and third room. Naturally, you also have the option of distributing the same audio source to two or three zones simultaneously.

## PLL (Phase Locked Loop) Jitter-Cleaning Circuit Technology

Jitter is an unwanted side-effect of the digital-to-analog conversion process. Caused by fluctuations in the time domain of a digital signal, jitter has a detrimental impact on perceived audio quality. PLL jitter-cleaning circuit technology reduces jitter by comparing the input and output phases of the digital signal and creating an accurate clock waveform. This enhances the precision of digital signal processing and noticeably improves audio quality. Jitter-cleaning technology works both for digital signals input via HDMI and for digital signals converted from analog signals inside the receiver itself.

## ADVANCED FEATURES

- THX® Select2 Plus™ Certified
- HDMI® (Version 1.4a to Support 3D and Audio Return Channel) with Deep Color™, x.v.Color™, LipSync, Dolby® TrueHD, DTS-HD Master Audio™, DVD-Audio, Super Audio CD, Multichannel PCM, and CEC
- 7 HDMI Inputs (1 Front/6 Rear) and 2 Outputs
- Audyssey DSX™ and Dolby® Pro Logic® IIz for New Surround Channels
- ISF (Imaging Science Foundation) Video Calibration
- Large-Size Transistors for High-Current Drive
- Network Capability for Streaming Audio Files (MP3, WMA, WMA Lossless, FLAC, WAV, Ogg Vorbis, AAC, LPCM)
- Internet Radio Connectivity (Last.fm, Napster, and vTuner)\*
- Certified with Windows® 7 and DLNA Version 1.5
- Front-Panel USB Input for Memory Devices and iPhone/iPod Models (Enables Display of Album Artwork)
- Firmware Updates via Ethernet and USB
- Powered Zone 2/3 and Zone 2/3 Pre Outs for Distributed Audio Playback in Multiple Rooms

\*Availability of services depends on region.

## AMPLIFIER FEATURES

- 180 W/Ch at 6  $\Omega$ , 1 kHz, 1 Channel Driven, IEC
- WRAT (Wide Range Amplifier Technology)
- Three-Stage Inverted Darlington Circuitry
- H.C.P.S. (High Current Power Supply) Massive High Power Transformer
- Linear Optimum Gain Volume Circuitry

## PROCESSING FEATURES

- Burr-Brown 192 kHz/24-Bit DACs (PCM1690 and PCM1789) for All Channels
- Two 32-Bit Processing DSP Chips (DA830 and CS49834)
- PLL Jitter-Cleaning Circuit Technology
- Dolby® TrueHD, DTS-HD Master Audio™, Dolby® Digital Plus, DTS-HD High-Resolution Audio™ Decoding
- HDMI Video Upscaling to 1080p with Faroudja DCDi Cinema™
- 4 DSP Modes for Gaming: Rock, Sports, Action, and RPG
- Music Optimizer™ for Compressed Digital Music Files
- Direct Mode and Pure Audio Mode
- A-Form Listening Mode Memory
- Theater-Dimensional Virtual Surround Function

## CONNECTION FEATURES

- Universal Port for Single-Cable Connection of Optional Onkyo Dock for iPhone/iPod or DAB+ Radio Tuner
- Component Video Switching (2 Inputs and 1 Output)
- 4 S-Video Inputs and 2 Outputs
- Analog RGB Video Input (D-sub, 15 pin) and Audio Input for PC
- 6 Digital Inputs (3 Optical and 3 Coaxial)
- 5 A/V Inputs (1 Front/4 Rear) and 1 Output
- Color-Coded, 7.1 Multichannel Inputs
- Video Output (Monitor)
- 1 Audio Input
- Phono Input
- Color-Coded, 9.2 Multichannel Pre Outs
- RS232 Port, IR (In/Out), and 12 V Trigger Outs (Zone 2/3)
- Bi-Amping Capability
- Color-Coded, Banana Plug-Compatible Speaker Posts
- RIHD (Remote Interactive over HDMI) for System Control

## OTHER FEATURES

- Audyssey MultEQ® for Room Acoustic Correction
- Audyssey Dynamic EQ® for Loudness Correction
- Audyssey Dynamic Volume™
- Overlaid Graphical On-Screen Display (OSD) via All Video Outputs
- Crossover Adjustment (40/50/60/70/80/90/100/120/150/200 Hz)
- A/V Sync Control Function (Up to 250 ms in 5 ms Steps)
- 40 FM/AM Random Presets
- RDS (PS/RT/PTY/TP)
- Compatible with RI (Remote Interactive) Dock for iPod
- Bi-Directional, Preprogrammed, and Customizable RI Remote Control with On-Screen Setup, Mode-Key LEDs, and Macro Presets for Four Activities

## SPECIFICATIONS

### AMPLIFIER SECTION

<b>Power Output</b>	
Front L/R	180 W/Ch (6 $\Omega$ , 1 kHz, 1 channel driven, IEC)
Center	180 W (6 $\Omega$ , 1 kHz, 1 channel driven, IEC)
Surround L/R	180 W/Ch (6 $\Omega$ , 1 kHz, 1 channel driven, IEC)
Surround Back L/R	180 W/Ch (6 $\Omega$ , 1 kHz, 1 channel driven, IEC)
Front High L/R, Front Wide L/R, or Zone 2/3 L/R	180 W/Ch (6 $\Omega$ , 1 kHz, 1 channel driven, IEC)
<b>Dynamic Power</b>	
	300 W (3 $\Omega$ , Front)
	250 W (4 $\Omega$ , Front)
	150 W (8 $\Omega$ , Front)

<b>THD (Total Harmonic Distortion)</b>	
	0.08% (Rated power)
<b>Damping Factor</b>	60 (Front, 1 kHz, 8 $\Omega$ )

<b>Input Sensitivity and Impedance</b>	
	200 mV/47 k $\Omega$ (Line)
	2.5 mV/47 k $\Omega$ (Phono MM)

<b>Rated RCA Output Level and Impedance</b>	
	200 mV/470 $\Omega$ (Pre out)

<b>Maximum RCA Output Level and Impedance</b>	
	4.6 V/470 $\Omega$ (Pre out)

<b>Phono Overload</b>	
	70 mV (MM, 1 kHz, 0.5%)

<b>Frequency Response</b>	
	5 Hz–100 kHz/+1 dB, -3 dB (Direct mode)

<b>Tone Control</b>	
	+10 dB, 50 Hz (Bass)
	+10 dB, 20 kHz (Treble)

<b>Signal-to-Noise Ratio</b>	
	110 dB (Line, IHF-A)
	80 dB (Phono, IHF-A)

<b>Speaker Impedance</b>	
	4 $\Omega$ –16 $\Omega$ or 6 $\Omega$ –16 $\Omega$

### VIDEO SECTION

<b>Input Sensitivity/Output Level and Impedance</b>	
Video	1.0 Vp-p/75 $\Omega$ (Component and S-Video Y)
	0.7 Vp-p/75 $\Omega$ (Component Pb/Cb, Pr/Cr)
	0.25 Vp-p/75 $\Omega$ (S-Video C)
	1.0 Vp-p/75 $\Omega$ (Composite)

<b>Component Video Frequency Response</b>	
	5 Hz–100 MHz/20 dB, -3 dB

### TUNER SECTION

<b>Tuning Frequency Range</b>	
FM	87.5 MHz–108 MHz
AM	522 kHz–1,611 kHz

<b>FM/AM Preset Memory</b>	
	40 stations

### GENERAL


<b>Power Supply</b>	AC 220–240 V~, 50/60 Hz
<b>Power Consumption</b>	830 W
<b>Dimensions (W x H x D)</b>	435 x 198.5 x 435.5 mm
<b>Weight</b>	18.7 kg

### ■ CARTON

<b>Dimensions (W x H x D)</b>	587 x 337 x 553 mm
<b>Weight</b>	23.5 kg

### ■ Supplied Accessories

- Indoor FM antenna • AM loop antenna • Speaker cable labels
- Speaker set-up microphone • Instruction manual • Quick start guide
- Remote controller • AA (R6) batteries x 2

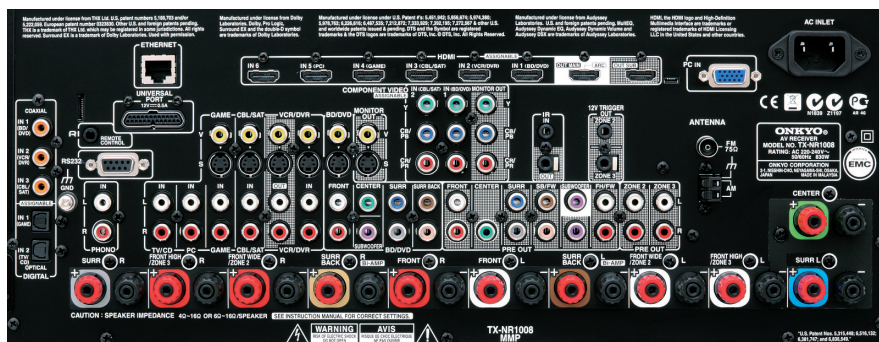

Due to a policy of continuous product improvement, Onkyo reserves the right to change specifications and appearance without notice. THX Select2 Plus is a trademark of THX Ltd. THX may be registered in some jurisdictions. All rights reserved. Manufactured under license from Dolby Laboratories. Dolby, Pro Logic, and the double-D symbol are trademarks of Dolby Laboratories. DTS is a registered trademark and the DTS logos and Symbol are trademarks of DTS, Inc. Manufactured under license from Audyssey Laboratories. U.S. and foreign patents pending. Audyssey MultEQ and Audyssey Dynamic EQ are registered trademarks, and Audyssey DSX and Audyssey Dynamic Volume are trademarks of Audyssey Laboratories. HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. iPod and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. "Made for iPod" and "Made for iPhone" mean that an electronic accessory has been designed to connect specifically to iPod or iPhone, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. x.v.Color is a trademark of Sony Corporation. Faroudja DCDi Cinema is a registered trademark of Genesis Microchip Inc. Windows 7 and the Windows logo are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. WRAT, Music Optimizer, and Theater-Dimensional are trademarks of Onkyo Corporation. All other trademarks and registered trademarks are the property of their respective holders.

**ONKYO**  
IMAGINATIVE SIGHT & SOUND

**Onkyo Corporation** 2-1 Nishishin-cho, Neyagawa-shi, Osaka 572-8540, JAPAN Tel: +81-72-831-8136 Fax: +81-72-833-5222 <http://www.onkyo.com/>  
**Onkyo Europe Electronics GmbH** Liegnitzerstrasse 6, 82194 Grobenzell, GERMANY Tel: +49-8142-4401-0 Fax: +49-8142-4401-555 <http://www.eu.onkyo.com/>  
**Onkyo UK Office** The Coach House, 81A High Street, Marlow, Buckinghamshire SL7 1AB, UNITED KINGDOM Tel: +44(0)1628-473350 Fax: +44(0)1628-401700 <http://www.onkyo.co.uk/>